


Model 230/8 and 250/8

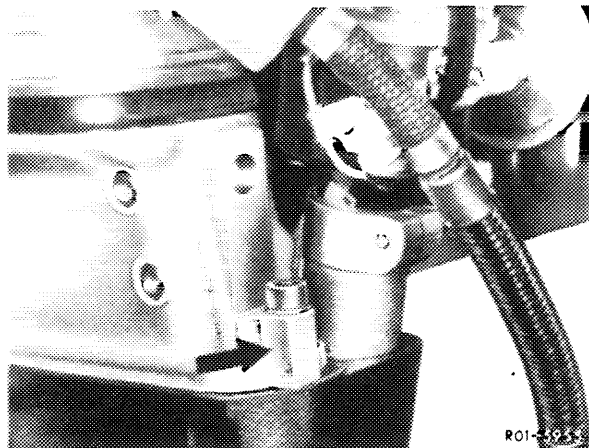

The fastening eye on cylinder head front left (refer to Fig. 01-12/1) has been increased from 16 to 23 mm and the pertinent cylinder head bolt has been extended by 5 mm (M 8 x 35).

Fig. 01-22/1

Standard Installation

Model	Chassis Model Designation	Chassis End No.	Engine Type Designation
230/8	114.015	065 816	180.954/955
250/8	114.010	055 352	114.920/921
250/8 USA	114.011	002 369	130.923
250/8 Cp.	114.021	005 169	114.920/921
250/8 Cp. USA	114.023	003 243	130.923

In the event of repair jobs, make sure that for cylinder heads with fastening eye 16 mm high the cylinder head M 8 x 30 will be used, and

with fastening eye 23 mm high, cylinder head bolt M 8 x 35.

Part Numbers

Designation	Part Numbers
Cylinder head bolt M 8 x 30	000912 008019
Cylinder head bolt M 8 x 35	000912 008022